


Skylight protection system **LIGHT-FLEX**

The flexible LIGHT collective fall prevention system by INNOTECH can be implemented in any desired size. It is the robust solution for very varied types of skylights and strip lights.

The system can be installed quickly and without problems on wood, concrete, steel and plastic.

- flexible fall-through protection for open and enclosed skylights
- especially for the securing of light strips
- simple to install or retrofit
- variable size adjustment even during installation
- variable section sizes for opening mechanism
- also for smoke and heat extraction systems
- express delivery on request
- high permeability to light and smoke
- certification to the latest state of the art:

GS-BAU-18
EN 1873:2016
EN 14963:2006

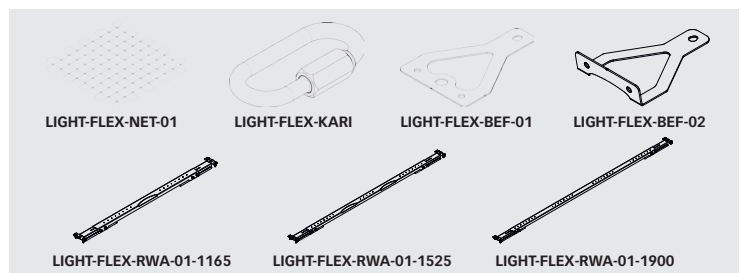

LIGHT-FLEX-NET-01
SKYLIGHT PROTECTION SYSTEM
Mesh width: max. 100 x 100 mm
Material: galvanised steel

High light and smoke permeability - straightforward installation and easy retrofitting.

LIGHT-FLEX-KARI
SCREW CARABINER
for LIGHT-FLEX-BEF-01
Material: galvanised steel
Load capacity: 125 kg

LIGHT-FLEX-BEF-01
FASTENING BRACKET for LIGHT-FLEX
Length: 130 mm
Width: 90 mm
Material: galvanised steel

LIGHT-FLEX-BEF-02
FASTENING BRACKET
for LIGHT-FLEX, PRE-CANTED
Length: 136 mm
Width: 90 mm
Material: galvanised steel

LIGHT-FLEX-RWA-01
STIFFENING RAIL
for LIGHT-FLEX-NET-01
Adjustment ranges:
1165 mm 800 to 1165 mm
1525 mm 1150 to 1525 mm
1900 mm 1525 to 1900 mm
Material: galvanised steel

Stiffening rail for LIGHT-FLEX-NET-01 for skylights with smoke and heat extraction system