











Lifeline system – non-passable **AIO** 

The ALLinONE lifeline system by INNOTECH® was developed as a restraint system, fall arrest system and rescue system. This affordable lifeline system adapts ideally to building and facade structures and can be optimally fastened to very different substructures. The modular system components allow a simple and error-free installation.

-  use as a restraint, fall arrest and rescue system
-  universal components ensure optimum adaptation to complex structural designs indoors and outdoors
-  fastening options on all substructures
-  minimum cable sag thanks to great base stability and constant spring pre-tension
-  simple product selection and installation thanks to combination end lock
-  less roof penetrations due to long post spacings of up to **15 m**
-  easy to check thanks to open design of the revolutionary end lock

-  all lifeline system components are made of high-quality stainless steel and aluminium
-  easy installation with universally usable system components
-  certification to the latest state of the art:

EN 795:2012 TYPE C and E
CEN/TS 16415:2013



TYPE RATING PLATE

AIO-TYP-50

RATING PLATE, AIO lifeline system, non-passable
Designation: Horizontal lifeline system

Material: Stainless steel AISI 316, plastic

Various attachment options



AIO-TYP-51

RATING PLATE, AIO lifeline system, non-passable (EN 795 C- E)
Designation: Horizontal lifeline system, **self-supporting**

Material: Stainless steel AISI 316, plastic

Various attachment options



ENDS END LOCK

AIO-ENDS-50

END LOCK, AIO lifeline system, non-passable (EN 795)

For a non-passable cable span with integrated shock force absorption!

Material: Stainless steel AISI 304, aluminium (anodised)

For a cable span with a corner set, a second AIO-ENDS-50 is required in addition, and for a straight cable span an AIO-ENDS-51 is required!




AIO-ENDS-51

END LOCK, AIO lifeline system, non-passable (EN 795)

For a non-passable cable span with integrated shock force absorption!

Material: Stainless steel AISI 304, aluminium (anodised)

To be used only in combination with AIO-ENDS-50, for a straight cable span!



CABLE STAINLESS STEEL CABLE

AIO-SEIL-30

STAINLESS STEEL CABLE (EN 795 C)

Dimensions: Ø 8 mm (7 x 7)

Breaking load: 37 kN

Material: Stainless steel AISI 316



Tested for INNOTECH® lifeline systems

SZH INTERMEDIATE BRACKET

AIO-SZH-13

INTERMEDIATE BRACKET, non-passable (EN 795 C)

Substructure: AIO-STA, AIO-STX, AIO-BKS, AIO-SAND, AIO-VARIO, AIO-SYST, EAP-QUAD, etc.

Connection: Thread M16

Material: Stainless steel AISI 304

Non-passable with the slider.



EDLE CORNER PASS-THROUGH ELEMENT

AIO-EDLE-14

CORNER PASS-THROUGH ELEMENT, non-passable (EN 795 C)


Substructure: AIO-STA, AIO-STX, AIO-FALZ, AIO-SAND, AIO-VARIO, AIO-SYST, etc.

Application: Internal corner formations

Connection: Thread M16

Material: Stainless steel AISI 304, plastic

For attachment of a variable corner set



ACCESSORIES

Y-STRETCH

DOUBLE-STRAND LANYARD, made of stretch belt with stretch construction and shock absorber

Material: 33 mm stretch belt

Plastic: polyamide, PES polyester

Fittings: aluminium, steel

Colour: orange/black


Weight: 1.68 kg

Lengths: 1.05 / 1.5 / 2 m

Temperature: -35°C to 40°C

Standard: EN 354, EN 355



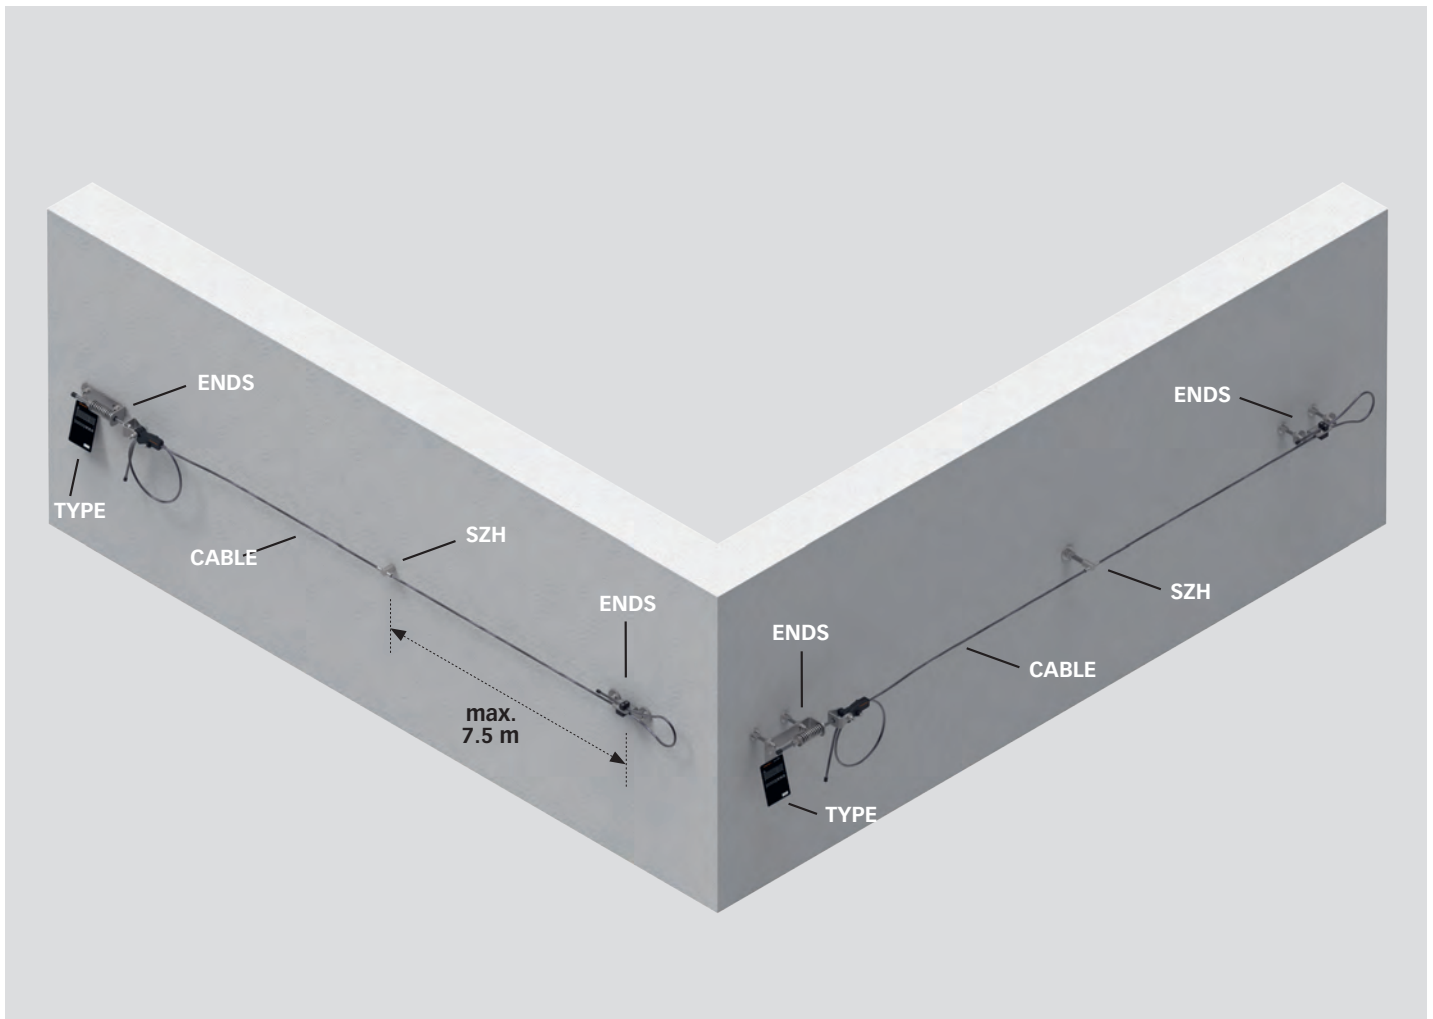











Lifeline lifeline – facade, non-passable **AIO**



The ALLinONE lifeline system by INNOTECH® was developed as a restraint system, fall arrest system and rescue system. This affordable lifeline system adapts ideally to complex building and facade structures and can be optimally fastened to very different substructures. The modular system components allow a simple and error-free installation.

-  use as a restraint, fall arrest and rescue system
-  universal components ensure optimum adaptation to complex structural designs indoors and outdoors
-  fastening options on all substructures
-  minimum cable sag thanks to great base stability and consistent spring pre-tension
-  simple product selection and installation thanks to combination end lock
-  low installation effort thanks to long post spacings of up to **7.5 m**
-  easy to check thanks to open design of the revolutionary end lock

-  all lifeline system components are made of high-quality stainless steel and aluminium
-  easy installation with universally usable system components
-  certification to the latest state of the art:

EN 795:2012 TYPE C and E
 CEN/TS 16415:2013



EN 795

TYPE RATING PLATE

AIO-TYP-50

RATING PLATE, AIO lifeline system, non-passable

Designation: Horizontal lifeline system

Material: Stainless steel AISI 316, plastic

Various attachment options



ENDS END LOCK

AIO-ENDS-50

END LOCK, AIO lifeline system, non-passable (EN 795)

For a non-passable cable span with integrated shock force absorption!

Material: Stainless steel AISI 304, aluminium (anodised)

For a cable span with a corner set, a second AIO-ENDS-50 is required in addition, and for a straight cable span an AIO-ENDS-51 is required!




AIO-ENDS-51

END LOCK, AIO lifeline system, non-passable (EN 795)

For a non-passable cable span with integrated shock force absorption!

Material: Stainless steel AISI 304, aluminium (anodised)

To be used only in combination with AIO-ENDS-50, for a straight cable span!



CABLE STAINLESS STEEL CABLE


AIO-SEIL-30

STAINLESS STEEL CABLE (EN 795 C)

Dimensions: Ø 8 mm (7 x 7)

Breaking load: 37 kN

Material: Stainless steel AISI 316



Tested for INNOTECH® lifeline systems

SZH INTERMEDIATE BRACKET

AIO-SZH-13

INTERMEDIATE BRACKET, non-passable (EN 795 C)

Substructure: AIO-STA, AIO-STX, AIO-BKS, AIO-SAND, AIO-VARIO, AIO-SYST, EAP-QUAD, etc.

Connection: Thread M16

Material: Stainless steel AISI 304

Non-passable with the slider.



ACCESSORIES

Y-STRETCH

DOUBLE-STRAND LANYARD, made of stretch belt with stretch construction and shock absorber

Material: 33 mm stretch belt

Plastic: polyamide, PES polyester

Fittings: aluminium, steel

Colour: orange/black

Weight: 1.68 kg

Lengths: 1.05 / 1.5 / 2 m

Temperature: -35°C to 40°C

Standard: EN 354, EN 355

