






## Detachable single anchor point **EAP-LOCK**


The **LOCK-13** single anchor point from INNOTECH with the detachable, rotating anchorage eye secures 2 people (including 1 person for the provision of first-aid) with personal protective equipment.

The matching **LOCK-11** receptacle sleeve from INNOTECH® is permanently attached to the masonry and has a protective cap, with which the single anchor point is suitably covered when not in use.

Additional testing was executed both statically and dynamically on the original substructure.

-  detachable anchor point with rotating anchorage eye
-  for concrete, wood, and steel constructions
-  optimised safety locking
-  architecturally unobtrusive (detachable)
-  certification as:

EN 795:2012 TYPE B  
CEN/TS 16415:2013

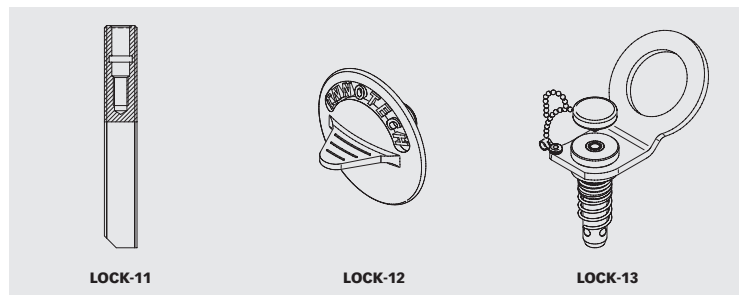

### EAP-LOCK-11

#### RECEPTACLE SLEEVE for EAP-LOCK-13 (EN 795 A)

Substructure: Concrete (at least C20/25), red brick, wood, steel construction  
Usable thread lengths: 100 / 150 / 200 / 300 / 400 / 500 mm  
Thread: M22

Drill hole: Ø 24 mm (depth of bore at least 110 mm)  
Accessories: 2x cover caps in red and white  
Material: Stainless steel (AISI 304)  
with M10 internal thread, suitable for pull-out test

### EAP-LOCK-12

#### END CAP for EAP-LOCK-11 in red or white

### EAP-LOCK-13

#### SINGLE ANCHOR POINT, detachable, rotating anchorage eye (EN 795 A)

Substructure: Receptacle sleeve EAP-LOCK-11  
Material: Stainless steel (AISI 304), aluminium, brass  
Increased safety thanks to innovative locking system!