










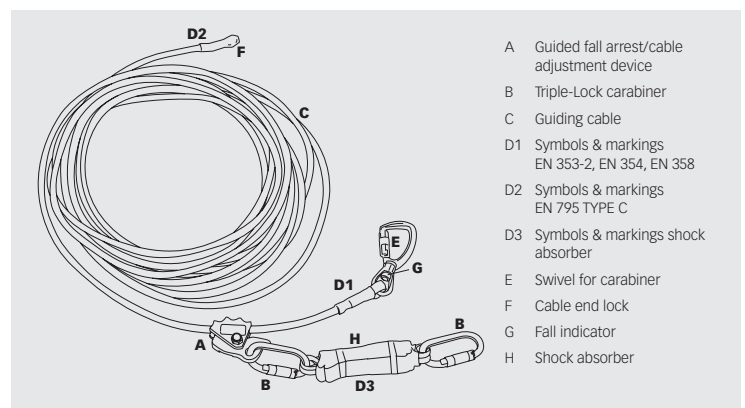
Lanyard **SHARK**

The SHARK lanyard by INNOTECH has been tested for horizontal use and is a winner because of the versatility of its functions: When used as a lanyard, as an anchorage device, as a positioning or restraint system or also as a travelling fall arrest device in a movable guide, it stands out because of its high-quality features: Even under extreme use, the steel core provides 100% security, and the securing cable, adjustable in length, resists any sharp edge.

And not least, the risk for the user is significantly reduced with high-quality lockable triple-lock steel carabiners. An installed indicator automatically signals a load from a fall.

-  Securing cable with steel core, textile covering and variable length adjustment device
-  Can also be used as horizontal lifeline system
-  Steel core ensures 100% security under extreme use
-  High-quality steel carabiner with automatic lock
-  Tested for horizontal use
-  Tested against sharp edges and corners
-  Certification to the latest state of the art:

EN 795:2012 TYPES B and C, EN 354:2010, EN 358:2000
 EN 353-2:2002, CEN/TS 16415:2013



PSA-SHARK

KERNMANTLE ROPE (Ø 12 mm) with steel core and guided fall arrest (EN 353-2 / EN 354 / EN 358 / EN 795)

Lengths: 2 / 5 / 10 / 15 m

PSA-SHARK-2 without integrated shock absorber, for:

- Restraint system (EN 354)
- Positioning system (EN 358)

From PSA-SHARK-5 and upwards, with integrated shock absorber, for:

- Fall arrest system/restraint system (EN 353-2)
- Positioning system (EN 358)
- Temporary horizontal lifeline system (EN 795)

Edge tested as per prEN 354:2008 Annex A and CNB11/P/11.054